


XtreamPure®

PLEATED, HIGH FLOW RATE STYLE LIQUID FILTER CARTRIDGES

Series XP-C

for use in PECO Series 55HX or 55VX XtreamPure® vessels or competitor vessels of similar design

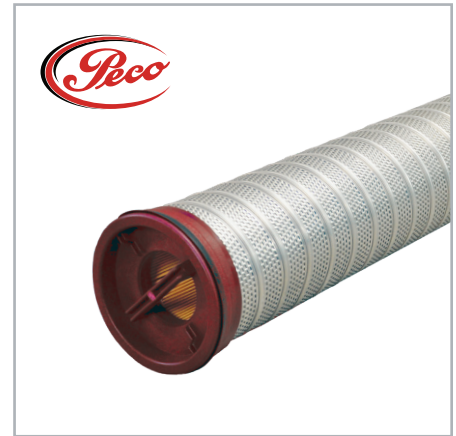

The XtreamPure, Series XP-C, is a large 6" diameter cartridge designed to filter liquid from inside-to-outside. This design has several advantages. It allows for high flow rate capability within a single cartridge so fewer cartridges are needed compared to traditional 2.5" and 3" diameter designs. It keeps contaminants trapped within the cartridge, so the vessel remains clean. The cartridge includes a handled end cap with patented chevron seal technology to provide an absolute

sealing of the cartridge to the basket support. This means there is no need for tools when sealing making it a safe, user friendly choice while also reducing maintenance time and money.

The XP-C is made from cellulose media with nylon end caps and includes a sturdy plated steel outer support. The outer support keeps pleats from ballooning and getting lodged in the vessels' cartridge support baskets.

FEATURES	BENEFITS
High Strength Rigid Outer Support	Ideal for harsh conditions and demanding applications by increasing media integrity during backflush or slug conditions.
Large Diameter (6") Cartridge	Yields higher flow rates and longer on-stream life than standard 2.5" filters requiring use of fewer cartridges and cutting capital expenditure.
Patented Chevron Seal	Ensures complete sealing compared to a standard O-ring seal, especially when support plate or baskets are out of round.
Integrated Handle in End Cap	No tools required for cartridge change-outs yields simple and safe change-outs to reduce downtime.
Inside-to-Outside Flow Direction	Contaminant captured inside cartridge provides cleaner and easier extraction during change-outs.

- Lube Oil
- Chemicals & Solvents
- Amine
- Glycol

APPLICATIONS



CHEVRON SEAL

Ensures a complete seal to prevent cartridge bypass

OUTER SUPPORT

Rigid cage structure prevents cartridge swelling and allows easy cartridge extraction from the support basket.



ENGINEERING YOUR SUCCESS.

MATERIALS

MEDIA	Pleated Lo-Cure Cellulose
OUTER SUPPORT	Plated Steel
END CAPS	Nylon
SEAL	Viton®
ADHESIVE	Polyurethane

NOMINAL DIMENSIONS

SIZE	O.D.	I.D.	LENGTH
4	6" / 152mm	3.0" / 76mm	40" / 1016mm
6	6" / 152mm	3.0" / 76mm	60" / 1524mm

PERFORMANCE

MICRON RATING: 5, 10, 20, 40

EFFICIENCY: 90%

OPERATING DATA

FLOW DIRECTION: Inside-to-Outside

MAX TEMP: 250°F / 121°C


MAX. DIFFERENTIAL PRESSURE: 50 psid / 3.4 bar

RECOMMENDED CHANGE-OUT

DIFFERENTIAL PRESSURE: 35 psid / 2.4 bar

PH RANGE: 5–9

Flow Rate vs. Clean Differential Pressure

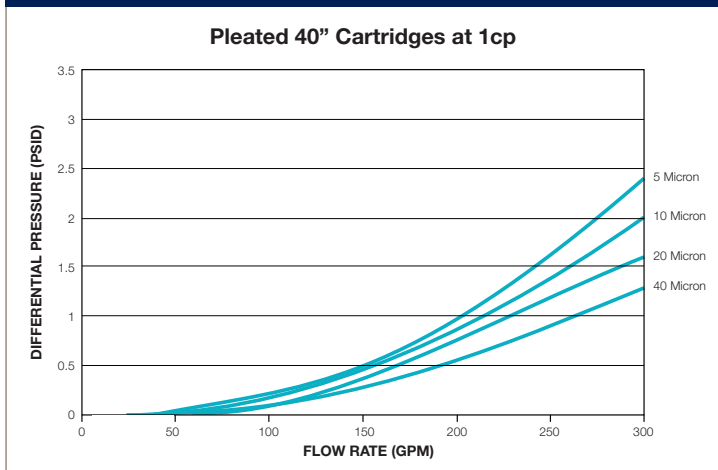

**ADDITIONAL PRODUCT INFORMATION
INCLUDING AVAILABLE PART NUMBERS**

Scan QR Code

- Protected by USA Patent No. 8,961,644.
- Viton® is a registered trademark of E. I. du Pont de Numours and Company.

© 2022 Parker Hannifin Corporation
DS-OG-XTREAMPURE-C 220825



Parker Hannifin Corporation
Industrial Process Filtration Division
Phone 940-325-2575 | Toll Free 1-800-877-7326
Email IPF.technical@support.parker.com
www.parker.com/ipf